


Maj 2022

Manual - Minibarer

MB 32




I. PARTS AND FEATURES

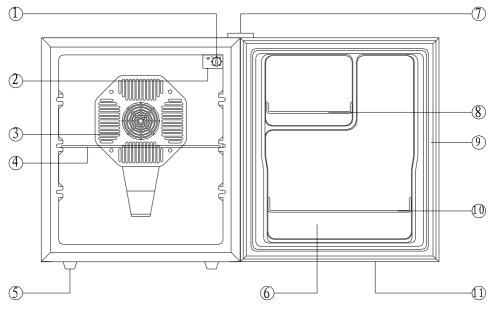

- 1. Temperature Control Knob
- 3. Cold Sink Fan Cover
- 5. Legs
- 7. Upper Hinge Cover
- 9. Door Gasket
- 11. Door

- 2. Interior Light
- 4. Shelf
- 6. Door Liner
- 8. Small Bottle Rack
- 10. Large Bottle Rack

Temperature Control

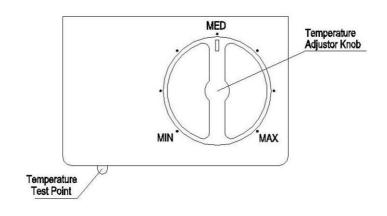

II.GENERAL SAFETY PRECAUTIONS

- After removing the refrigerator from the package, make sure it is in good condition.
 In case of doubt, do not use it and contact an authorized service center.
- Plastic bags, nails, etc. should be kept out of the reach of children.
- Read the operation manual carefully, check and make sure that the rating data on the rating nameplate corresponds to your power supply.
- This refrigerator can only be used in the designed use. The manufacturer will not respond for any damage due to improper use or repairs made by unqualified personnel.
- Before cleaning the refrigerator, make sure it is unplugged. Never clean the unit
 with an acid impregnant, medical, dilution, gasoline, oil or any other kind of
 chemical substance that could damage the refrigerator.
- Repair should only be made by authorized service centers.

Caution:

- 1. To reduce the risk of fire, replace only with same type fuse.
- 2. Free standing installation only.
- 3. Do not use extension cords.

Warning:



- If the supply cord is damaged, it must be replaced by the manufacturer or service agent or similarly qualified person in order to avoid hazard.
- 2. Please screw off the door before throwing it away.
- 3. Please keep the appliance away from any flammable substances.
- 4. To avoid a hazard due to the instability of the appliance, it must be fixed according to the instructions.
- 5. Children should be supervised to ensure that they do not play with the appliance.
- 6. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- 7. Keep ventilation holes clear of obstruction.


III. OPERATION OF REFRIGERATOR

- Clean the inside before use.
- Fix the shelves properly according to the instruction.
- When use for the first time (or not use for a long time), you should adjust the temperature to minimum and have the cabinet empty running for 2 hours, and then adjust to the desired temperature.
- When the power is connected, cooling system starts to work. The TEMP-ADJ
 knob(thermostat) is set on certain position, which means that if the temperature
 in the refrigerator reaches the point set, Self-control Temperature System stops
 cooling system so the temperature in the cabinet rises gradually.
- When the inside temperature rises above the set point, Cooling Self-control
 Temperature starts to work again, the refrigerator enter into cooling circles.
- When you want to change the temperature in the cabinet, You can make use of
 the temperature setting knob to set the temperature. The temperature range is
 6°C—12°C (± 1°C), after the temperature is set on one certain point and when
 the temperature inside reaches this point, the automatic temperature control
 system begin to work.

IV. Reversing the Door Swing of Your Appliance

This refrigerator has the capability of the door opening from either the left or right side. The unit is delivered to you with the door opening from the left side. Should you desire to reverse the opening direction, please call customer service for reversal instruction or the chart following the installation of an adjustment:

- Pull out the cover and 4 pcs screws, see step 1 and 2.
- Take out upper hinge, see step 3.
- Pull out the other cover, see step 4.
- Take out the whole door, see step 5.
- Pull out the 4 pcs screw and take out the down hinge, see step 6 and 7.
- Pull out the feet on anther side, see step 8.
- Fix the down hinge into another side which pull out the feet by step 8;
- Fix the whole door into the down hinge; then fix the upper hinge by screws, and fix the cover.

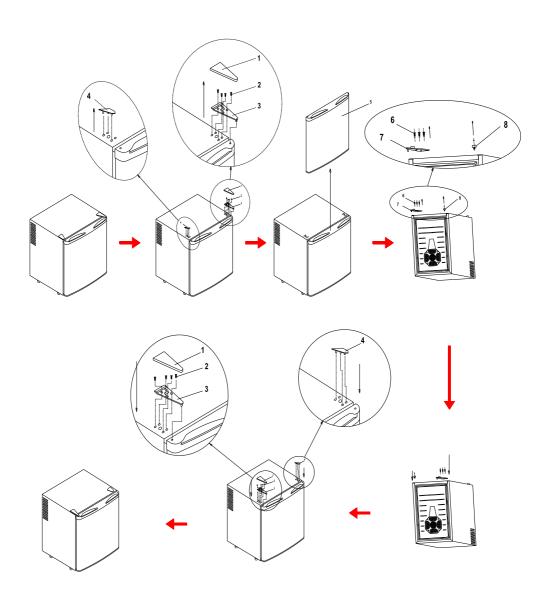

V. PARTICULAR PRECAUTIONS

Please unplug the refrigerator before moving.

- Please check if all the parts are available before installation.
- In order to get the best performance at its potential, this refrigerator needs to be placed on flat floor, with 5cm spaces from the wall at each side and 10 cm at the backside.
- The height of the refrigerator can be adjustable by adjusting the four legs, but cannot be over 20 mm of each.
- Keep ventilation holes clear, and keep at a distance of 50 mm from surroundings.
- Hot food should be cooled down before placing in the refrigerator.
- Please keep away from the heat resources or gas.
- Avoid direct sunshine and carry high temperature.
- Do not place heavy articles on the top of the refrigerator.

VI.TECHNICAL DATA

Model	Semiconductor Electric Refrigerator	
Climate Class		
Refrigerant Gas		
Refrigerant Charge		
Temperature Range		
(°C)	Please refer to the information indicated on the product. You will	
Input Power	find the information on the rating label on the back of the unit as	
Rated Frequency	well as inside the cooling compartment. The circuit diagram is	
Rated Voltage	displayed on the back of the unit as well as inside the cooling	
Internal volume	compartment	
Net Weight		
Gross Weight		
Foaming Agent		
External Dimension		
(mm)		

VII. MAINTENANCE

- Shut off power supply before cleaning cabinet.
- Clean the cabinet with soda water first and with clean water last.

- Do not use soap or detergent for the cabinet.
- Clean the refrigerator regularly.

VIII. TROUBLE SHOOTING

Symptoms	Possible cause	Solutions
No cooling	Plug not put in	Put in the plug
	 Low voltage 	Ensure normal voltage
	Fuse broken	Change fuse
		Keep the refrigerator away from
	The refrigerator is placed	sunshine or other heat source;
Not cold enough	too near heat source;	Place the refrigerator in the area
temperature	 Bad ventilation; 	with good ventilation and keep
inside	 Fans don't work; 	things away from the fans;
	The door is not closed	Check whether the plug is
	tightly or opened too	connected or change the fan;
	frequently or for too long	Close the door tightly and don't
	time;	open the door too frequently or
		for too long time.
Peculiar smell	Check whether there is	Wrap the source or take it out
inside Refrigerator	any sour inside	
	Set temperature	
Inside light flash	Higher than inner	
	Temperature;	Adjust the adjustor
	The automatic	Normal function ,No repair needed
	Defrost function	
	Start to work	
Frost on the cold sink	Too much humidity or too	Output the plug, Stop the power, and
	Low temperature	defrost by hand, Connect power again
	Inside the case	when the ice thaws

KONTAKT OS/CONTACT US

Salg

+45 8750 3447 salg@vibocold.dk **Service**

+45 8750 3419 service@vibocold.dk

Telefontid:

Mandag - torsdag: 8 - 16 Fredag: 8 - 15.30 Reservedele

+45 8750 3422 parts@vibocold.dk



Holstebrovej 101 DK-8800 Viborg

T +45 9861 3411

www.vibocold.dk

Vibocold A/S forbeholder sig ret til at ændre enhedens parametre og indføre forskellige tekniske løsninger. Oplysningerne i dette dokument kan ændres af fabrikanten uden meddelelse til brugeren. Kopiering af denne vejledning uden tilladelse er forbudt. Billeder og tegninger er kun til illustration og kan afvige fra din enhed

Vibocold A/S reserves the right to change the parameters of the device and introducing different technical solutions. The information contained in this document may be changed by the manufacturer without notice to the user. Copying of this manual without permission is prohibited. Pictures and drawings are for illustration only and may differ from your device

